

THE POWER OF PERFORMANCE



SAFETY SHOES & WORKWEAR

2025/S2 CATALOGUE / ENG






THE POWER OF PERFORMANCE

THE SAFETY SHOE THAT MAKES YOU FEEL BETTER.

(EN ISO 20345:2022


SPARCOTEAMWORK.COM

SAFETY AND TECHNOLOGY IN MOTORSPORT AND AT WORK

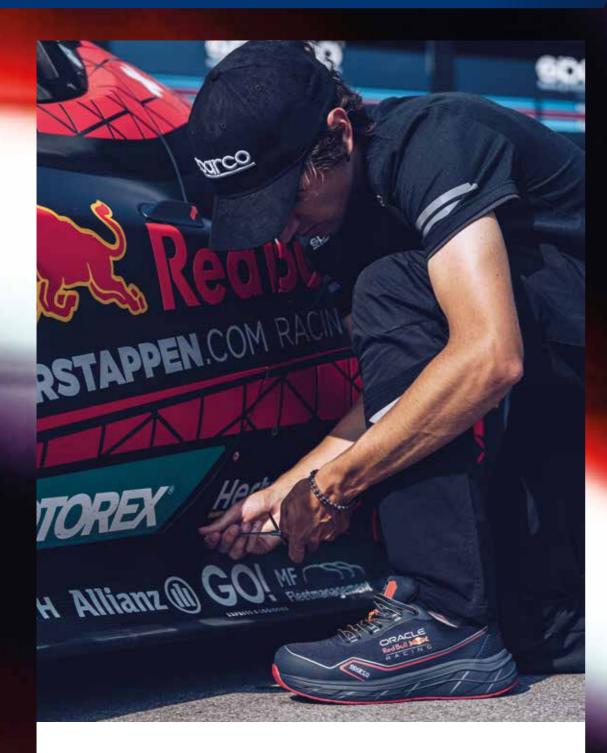

Sparco Teamwork is the collection of shoes and workwear where safety, lightness and design draw inspiration from the motorsport experience, translating into a work key with the same goal: to guarantee maximum performance.


BEST FORMULA1 TEAMS CHOOSE SPARCO

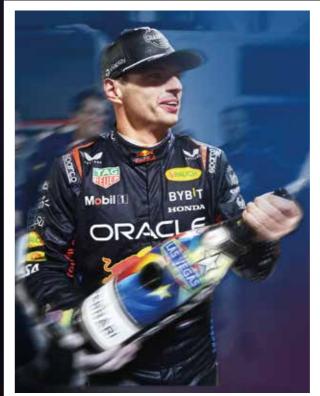







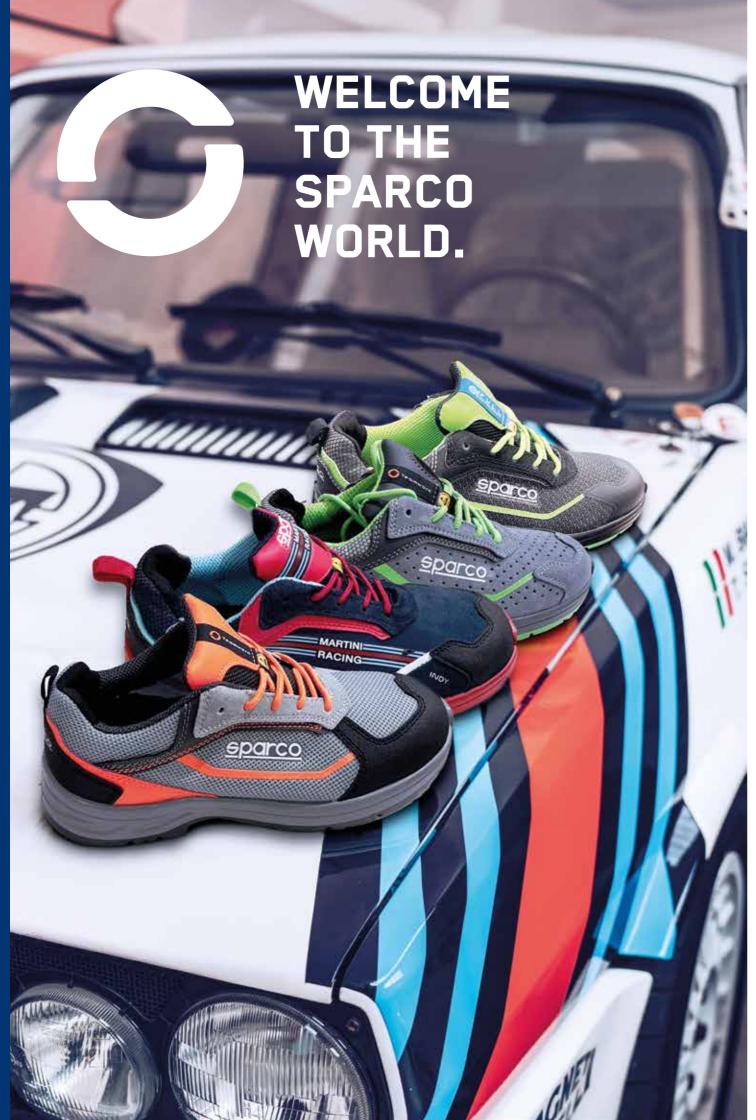

INDEX


SAFETY SHOES AND WORKWEAR









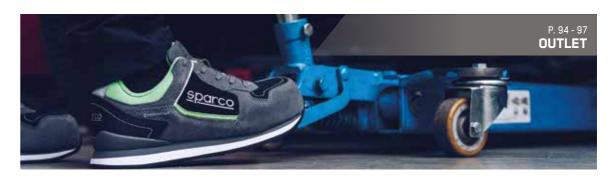

9

TECHNOLOGY

SPARCO TEAMWORK shoes are developed using the best technologies in terms of soles and midsoles. The aim is to optimize the exertion produced in walking by the forefoot where the greatest stresses for the user are concentrated, thus returning 70% of the energy produced.

This benefit offers advantages in using SPARCO TEAMWORK footwear, such as:

- less fatigue at the end of the day, thus improving reflexes and attention to the dangers of slipping and tripping injuries;
- less exertion in walking;
- muscles relaxation.

TWISTTECH



The specific Zigzag design of the TWIST TECH tread promotes flexion, guaranteeing maximum grip in every situation.

W-FLEX

less strain on the back and spine:



The w-shaped design of the w-flex tread benefits flexion, Guaranteing maximum grip in any situation.

FLEX*GFIP* (±)



Super light sole in dual density polyurethane with special design of the lugs which guarantee maximum grip in all flexion conditions.

CROSS6517



rubber tread with lugs that guarantee a strong grip even on particularly uneven surfaces.

MULTI*GSIP*



Ultralight sole with shock absorbing effect provided by a thick ultralight EVA midsole and MULTIGRIP RUBBER tread.

STREETTECH



sole designed to facilitate dynamic use and move safely in all situations.

Laminar profiles for greater lipping resistance. Profiles engraved for a better arip on stairs

Laminar profile

to increase grip.

Ultralight sole in single-density polyurethane designed for intensive use where the foot bends frequently.

R-III■





Ultra-resistant PU sole and HRO rubber tread , PRISM-FLE + texture which allows for high grip in all support conditions.

DYN/TECH



Lightweight dual density polyurethane sole with dynamic drain design to facilitate the outflow of liquids, always guaranteeing maximum grip.

WAVETECH



Superlight sole with phylon midsole and HRO rubber tread. Suitable for any use, even for outdoor leisure.

LINE **TEAMWORK SIPS**

RUNNING STYLE SAFETY FOOTWEAR. SEAMLESS UPPER MADE OF ULTRA-BREATHABLE 3D FABRIC, ANTI-ABRASION TPU REINFORCEMENTS AND 3D HF DETAILS. EVA MIDSOLE AND "FO+HRO" RUBBER TREAD. LIGHTWEIGHT AND SPORTY. TO ENHANCE YOUR DYNAMISM.

THE SUPER COMFORT EVA MIDSOLE PROVIDES AN UNMATCHED CUSHIONING EFFECT, INCREASING THE ELASTIC ENERGY RETURNED AND REDUCING FATIGUE AT THE END OF THE DAY. SPARCO TEAMWORK: THE WORK SHOE THAT MAKES YOU FEEL BETTER.







THE SPECIFIC ZIGZAG DESIGN OF THE TWIST TECH TREAD PROMOTES FLEXION, GUARANTEEING MAXIMUM GRIP IN ANY SITUATION.





DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®).

action and profiles the outflow of liquids.

01 Segmented profiles for self-cleaning

- 02 Sculpted lugs for greater slip resistance.
- 03 Segmented profiles to facilitate bending as well as the flow of liquids.
- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.
- SR Slip resistance on ceramic tile floor with glycerine.
- **HRO** Contact Heat Resistance (300 °C. for 60").

P. 100

<u>5</u>

LINFORD ESD S1PS SR FO HRO

07545..NR



(€EN ISO 20345:2022



UPPER:

seamless breathable micro-perforated 3D fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

ROTOR ESD S1PS SR FO HRO











BTB0019B0K12...

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

LINING:

breathable micro-perforated 3D fabric.

Closing system with cable and quick release rotor.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PL).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

single-density PU with energy absorption on the heel.

SIZES:

LINE

TEAMWORK S3S

RUNNING-STYLE SAFETY FOOTWEAR.

SEAMLESS UPPER MADE OF WATER-RESISTANT RIP-STOP FABRIC.

ANTI-ABRASION TPU REINFORCEMENTS AND 3D HF DETAILS.

EVA MIDSOLE AND "FO+HRO" RUBBER TREAD. LIGHTWEIGHT,

VERSATILE AND RESISTANT. THEY ARE READY FOR ANY CHALLENGE.

THE SUPER COMFORT EVA MIDSOLE PROVIDES AN UNMATCHED CUSHIONING EFFECT, INCREASING THE ELASTIC ENERGY RETURNED AND REDUCING FATIGUE AT THE END OF THE DAY. SPARCO TEAMWORK: THE WORK SHOE THAT MAKES YOU FEEL BETTER.



- **01** Segmented profiles for self-cleaning action and profiles the outflow
- 02 Sculpted lugs for greater slip resistance.
- 03 Segmented profiles to facilitate bending as well as the flow of liquids.

THE SPECIFIC ZIGZAG DESIGN OF THE TWIST TECH TREAD PROMOTES FLEXION, GUARANTEEING MAXIMUM GRIP IN ANY SITUATION.



C€EN ISO 20345:2022



DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®).

- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.
- SR Slip resistance on ceramic tile floor with glycerine.
- HRO Contact Heat Resistance (300 °C. for 60").

P. 100



S3S LINE

MRO CO

LUCAS ESD S3S SR FO HRO

BTB0013B0E54..

seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric..

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy

absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

GEORGE ESD S3S SR FO HRO











BTB0013B0N23...

seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

CHRIS ESD S3S SR FO HRO











BTB0013B0K11...

seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric..

REMOVABLE INSOLE: antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

SAFETY SHOES

CAPSULE COLLECTIONS TEAMWORK

CAPSULE LINE OF RUNNING-STYLE **SAFETY FOOTWEAR** WITH OFFICIAL **GULF, MARTINI RACING AND ORACLE RED BULL RACING LIVERIES**. SEAMLESS UPPER IN 3D ULTRA-BREATHABLE OR WATER-REPELLENT RIP-STOP FABRIC, ANTI-ABRASION TPU REINFORCEMENTS AND 3D HF DETAILS. EVA MIDSOLE AND "FO+HRO" RUBBER TREAD. LIGHTWEIGHT AND EXCLUSIVE, FOR THOSE LOOKING FOR UNIQUE STYLE AND PERFORMANCE.

THE SUPER COMFORT EVA MIDSOLE PROVIDES AN UNMATCHED CUSHIONING EFFECT, INCREASING THE ELASTIC ENERGY RETURNED AND REDUCING FATIGUE AT THE END OF THE DAY. SPARCO TEAMWORK: THE WORK SHOE THAT MAKES YOU FEEL BETTER.







- O1 Segmented profiles for self-cleaning action and profiles the outflow of liquids.
- **02** Sculpted lugs for greater slip resistance.
- O3 Segmented profiles to facilitate bending as well as the flow of liquids.

THE SPECIFIC ZIGZAG DESIGN OF THE TWIST TECH TREAD PROMOTES FLEXION, GUARANTEEING MAXIMUM GRIP IN ANY SITUATION.





DGUV 112-191 COMPLIANT
(Optional and interchangeable orthopaedic insocks BY SECOSOL®).

- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.
- **SR** Slip resistance on ceramic tile floor with glycerine.
- **HRO** Contact Heat Resistance (300 °C. for 60").

P. 100

MILTON ESD S1PS SR FO HRO

(€EN ISO 20345:2022

PRACLE SUPPLIER CRACLE SUPPLIER TEAM SUPPLIER

UPPER: seamless breathable micro-perforated 3D fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

07545RB..BM

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

KEYNES ESD S3S SR FO HRO

HRO ORACLE



BTB0016R0N31..

HDD

seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric..

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES


36-48 (UK 3½-13).

16

LINE **TRACTION**

SPORTS-STYLE SAFETY FOOTWEAR, **COMPLIANT WITH THE NEW** EN ISO 20345:2022+A1:2024. REFLECTIVE ANTI-ABRASION FABRIC **UPPER**, EVA MIDSOLE AND "FO+HRO" RUBBER TREAD.

FLEXIBLE, LIGHTWEIGHT AND SPORTY, FOR THOSE LOOKING FOR SAFETY AND PERFORMANCE.

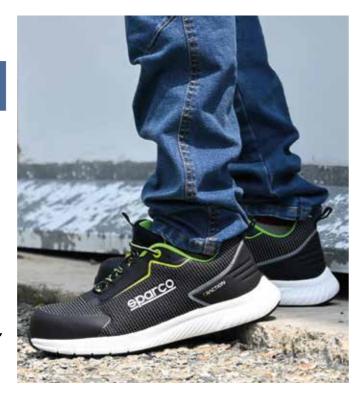



THE W-SHAPED DESIGN OF THE W-FLEX TREAD BENEFITS FLEXION, GUARANTEING MAXIMUM GRIP IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024

- **01** Sculpted profiles to ensure maximum grip in any conditions.
- 02 Central studs with heel carving for maximum flexibility and grip.
- 03 Specific design of the central W studs to ensure optimal drainage of liquids and greater grip.

PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 100

YUKI ESD S1PS SR FO HRO









BTB0002B0K35

reflective anti-abrasion fabric, TPU reinforcements and 3D HF details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

SUZUKA ESD S1PS SR FO HRO







BTB0002B0K05...

reflective anti-abrasion fabric. TPU reinforcements and 3D HF details.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

SANYO ESD S1PS SR FO HRO











BTB0002B0K15...

reflective anti-abrasion fabric, TPU reinforcements and 3D HF details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES.

36-48 (UK 3½-13).

FUJI ESD S1PS SR FO HRO







BTB0002B0K01...

reflective anti-abrasion fabric, TPU reinforcements and 3D HF details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

LINE TRACTION

SPORTS-STYLE SAFETY FOOTWEAR. COMPLIANT WITH THE NEW EN ISO 20345:2022+A1:2024. REFLECTIVE ANTI-ABRASION FABRIC OR SOFT TUMBLED NUBUCK UPPER, EVA MIDSOLE AND "FO+HRO" RUBBER TREAD. FLEXIBLE, LIGHTWEIGHT AND SPORTY, FOR THOSE LOOKING FOR SAFETY AND PERFORMANCE.



- O1 Sculpted profiles to ensure maximum grip in any conditions.
- 02 Central studs with heel carving for maximum flexibility and grip.
- 03 Specific design of the central W studs to ensure optimal drainage of liquids and greater grip.

THE W-SHAPED DESIGN OF THE W-FLEX TREAD BENEFITS FLEXION, GUARANTEING MAXIMUM GRIP IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024



- SR Slip resistance on ceramic tile floor with glycerine.
- **HRO** Contact Heat Resistance (300 °C. for 60").

P. 100



TRACTION LINE

ASAN ESD S3S SR FO HRO

BTB0018B0K13...









UPPER:

reflective and water repellent anti-abrasion fabric.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

TAKUMA ESD S3S SR FO HRO SC

water repellent soft tumblednubuck. textured microfibre reinforcements.

LINING:

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU low density

BTB0030B0K30...

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

NAOKI ESD S3S SR FO HRO







BTB0029B0K15

reflective, breathable and water-resistant anti-abrasion fabric. Anti-abrasion TPU inserts with 3D details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

LINE INDY-R S1PS

SAFETY FOOTWEAR MADE OF ULTRA-BREATHABLE PERFORATED MESH, SUEDE AND MICROFIBER REINFORCEMENTS. "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG). COMFORTABLE AND ULTRA-BREATHABLE TO ALWAYS WORK EASILY.



- 01 Laminar profile to increase grip for SR test.
- **02** Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).

SONOMA ESD SIPS SR FO LG



- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail
- SR Slip resistance on ceramic tile floor with glycerine.
- LG Ladder grip.

P. 100

(€EN ISO 20345:2022

07539..GSVF



ultra-breathable perforated mesh, suede and microfiber reinforcements. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

PU dual density with absorption of energy on the heel + LG.

> SIZES: 35-48 (UK 2½-13).



PATO ESD S1PS SR FO LG





07539..GRAF

ultra-breathable perforated mesh and microfiber reinforcements. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES: 35-48 (UK 2½-13).

5

LINE INDY S1PS

SAFETY FOOTWEAR MADE OF FINE PERFORATED SUEDE LEATHER, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG).

COMFORTABLE AND BREATHABLE TO WORK EASILY EVERYDAY.



"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).



METAL ESSO

(€EN ISO 20345:2022

DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®).

- 01 Laminar profile to increase grip for SR test.
- 02 Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with alycerine.

LG Ladder grip.

P. 100

FELIX ESD S1PS SR FO LG







07538..GRVF

perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

35-48 (UK 2½-13).

COLTON ESD S1PS SR FO LG

07538..TAGI

perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

PU dual density with absorption of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

TEXAS ESD S1PS SR FO LG













perforated suede and microfiber reinforcements.

Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).

DETROIT ESD S1PS SR FO LG







07538..NRGS

perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

LINE INDY S3S NUBUCK

SAFETY FOOTWEAR MADE OF SOFT TUMBLED NUBUCK, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG).




"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).



(€EN ISO 20345:2022

- 01 Laminar profile to increase grip for SR test.
- 02 Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.



SR Slip resistance - on ceramic tile floor with alycerine.

LG Ladder grip.

P. 100

CONOR ESD S3S SR FO LG

ELEGANT, SOFT AND RESISTANT,

PERFECT IN ANY CONDITION.











07543..GSGF

water repellent nubuck and microfiber reinforcements. Additional 2nd color laces included.

LINING.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

JURI ESD S3S SR FO LG

07544..GSGF









water repellent nubuck and microfiber reinforcements. Specific eyelet for quick release. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

of energy on the heel + LG.

PU dual density with absorption

SIZES:

35-48 (UK 2½-13).

GREGOR ESD S3S SR FO LG

07543..NRNR









water repellent nubuck and microfiber reinforcements.

Additional 2nd color laces included.

LINING: breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).

OSCAR ESD S3S SR FO LG

07544..NRNR









water repellent nubuck and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

LINE INDY-e S3S

SAFETY FOOTWEAR MADE OF SPECIAL REGENERATED ANTI-ABRASION MATERIAL SPARCO(R) FULL EFFICIENCY. HF REINFORCEMENT ON THE TOE, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG). LIGHTWEIGHT, **ENVIRONMENTALLY FRIENDLY AND RESISTANT FOR ANY WORK ENVIRONMENTS.**

Its attention to detail, care devoted to the choice of sustainable materials and its construction of models totally styled, designed and validated in Italy has allowed SPARCO to develop the FULL EFFICIENCY project. whose basic principles are:

VIRTUOUS CIRCULAR PRODUCTION CYCLE

ASTER ESD S3S SR FO LG

ZERO WASTE TARGET

- CORPORATE SOCIAL RESPONSABILITY
- FULLY OWNED TECHNOLOGY





07540..NRCE

special regenerated anti-abrasion material Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).

FORESTER ESD S3S SR FO LG

07540..NRVF







special regenerated anti-abrasion material Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).



01 Laminar profile to increase grip for SR test.

02 Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).

03 Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).



(€EN ISO 20345:2022



PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with alycerine.

LG Ladder grip.

P. 100

SUNNY ESD S3S SR FO LG

07542..NRCE

special regenerated anti-abrasion material

Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Specific eyelet for quick release. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

RANGER ESD S3S SR FO LG

07542..NRVF







special regenerated anti-abrasion material Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Specific eyelet for quick release. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

LINING:

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption

of energy on the heel + LG.

SIZES:

LINE INDY S3S

SAFETY FOOTWEAR, MADE OF FINE WATER REPELLENT SUEDE LEATHER OR NUBUCK, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG). LIGHTWEIGHT AND SUITABLE FOR ANY USE.



- 01 Laminar profile to increase grip for SR test.
- 02 Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH **SPECIAL HEEL COMPLIANT WITH THE** REQUIREMENTS FOR LADDER GRIP (LG).



(€EN ISO 20345:2022

DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®).

- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail
- SR Slip resistance on ceramic tile floor with glycerine.
- LG Ladder grip.

P. 100



INDY S3S LINE

DANICA ESD S3S SR FO LG





water repellent suede

07537..GRFU

and microfiber reinforcements. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel + LG.

SIZES: 35-48 (UK 2½-13).

BALTIMORA ESD S3S SR FO LG

07537..BMGF













water repellent suede and microfiber reinforcements. Additional 2nd color laces included.

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

RICHMOND ESD S3S SR FO LG

07541..BMGF





water repellent nubuck and microfiber reinforcements. Specific eyelet for quick release.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

Additional 2nd color laces included.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES:

CAPSULE COLLECTIONS

INDY

CAPSULE LINE OF SAFETY FOOTWEAR MADE OF FINE PERFORATED OR WATER-REPELLENT SUEDE, WITH OFFICIAL GULF AND MARTINI RACING LIVERY. "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG). COMFORTABLE AND RESISTANT, FOR A COLOURFUL AND DISTINCTIVE LOOK.



- 01 Laminar profile to increase grip for SR test.
- **02** Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).



- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail
- SR Slip resistance on ceramic tile floor with glycerine.
- LG Ladder grip.

P. 100

(€EN ISO 20345:2022

07538GU...BMAF



perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:


zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).

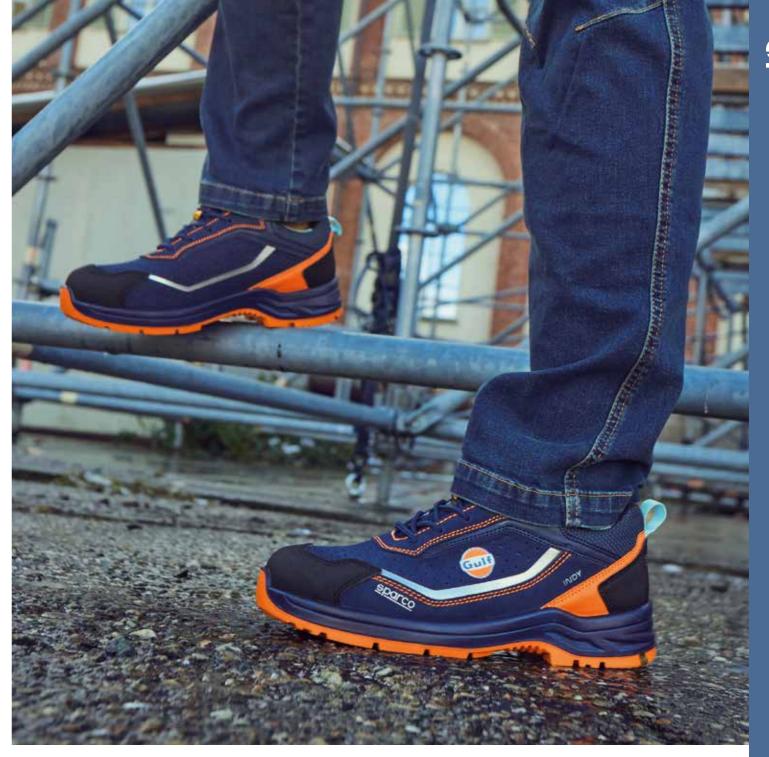

SANREMO ESD S3S SR FO LG

OFFICIAL LICENSED PRODUCTS

07537MR..BMRS

water repellent suede and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES: 35-48 (UK 2½-13).

LINE

HORIZON

SAFETY FOOTWEAR MADE OF SUEDE AND NYLON UPPER. ULTRALIGHT TEXTILE FIBER ANTI-PERFORATION INSOLE. LIGHT AND DURABLE, THEY ARE SUITABLE FOR ANY WORKING CONDITIONS.



- 01 Anti-fatigue cell to increase SR energy absorption.
- 02 Profiles engraved for a better grip on stairs.
- 03 Self-cleaning lugs.

PS Puncture resistance

(min. 1100 N & any single value

ULTRALIGHT DUAL-DENSITY POLYURETHANE SOLE DESIGNED TO FACILITATE DYNAMIC USE AND MOVE SAFELY IN ANY SITUATION.




(€EN ISO 20345:2022



DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®)

P. 100

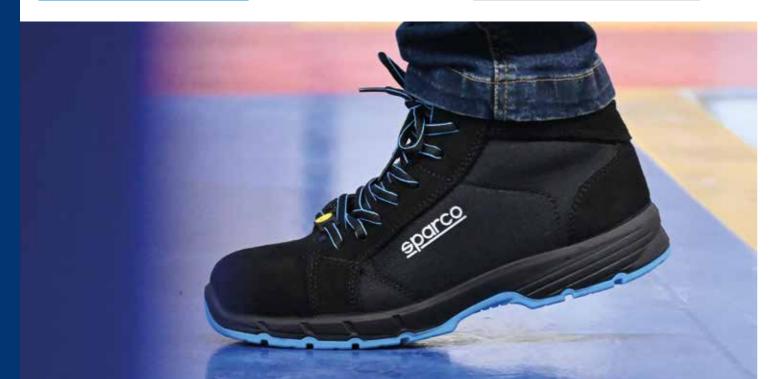









07546..GSVF

UPPER: abrasion resistant fine suede.

I INING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

dual-density polyurethane

with energy absorption on the heel.

SIZES:

35-49 (UK 2½-14).

MORENO ESD S1PS SR FO

07546..NRCE













UPPER:

abrasion resistant fine suede.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

dual-density polyurethane with energy absorption on the heel.

SIZES:

35-49 (UK 2½-14).

FARGO ESD S3S SR FO





07547..NRCE

UPPER:

water penetration-resistant nylon and suede.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

dual-density polyurethane with energy absorption on the heel.

35-49 (UK 2½-14).

LINE **TARGA**

SAFETY FOOTWEAR MADE OF FINE SMOOTH LEATHER RESISTANT TO WATER PENETRATION. **SOLE IN BI-DENSITY POLYURETHANE** "STREET-TECH" COMPLIANT SR+FO. DURABLE AND RESISTANT, THEY ARE PERFECT IN ANY SITUATION.



ULTRALIGHT DUAL-DENSITY POLYURETHANE SOLE DESIGNED TO FACILITATE DYNAMIC USE AND MOVE SAFELY IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024

- 01 Anti-fatigue cell to increase SR energy absorption.
- 02 Profiles engraved for a better grip on stairs.
- 03 Self-cleaning lugs.
- PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.
- SR Slip resistance on ceramic tile floor with glycerine.

P. 100

DGUV 112-191 COMPLIANT

(Optional and interchangeable orthopaedic insocks BY SECOSOL®)

ARTURO ESD S3S SR FO











BTB0011B0K15...

high quality water repellent smooth leather. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic in PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption of energy on the heel.

SIZES:

36-48 (UK 3½-13).

WILLY ESD S3S SR FO

METAL FIRE CO

BTB0012B0K15...

high quality water repellent smooth leather. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic in PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES:

36-48 (UK 3½-13).

SANDRO ESD S3S SR FO











BTB0011B0K11...

high quality water repellent smooth leather. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES:

36-48 (UK 3½-13).

PAUL ESD S3S SR FO











BTB0012B0K11...

high quality water repellent smooth leather. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES:

LINE **TARGA**

SAFETY FOOTWEAR MADE OF FINE PULL-UP LEATHER RESISTANT TO WATER PENETRATION. SOLE IN BI-DENSITY POLYURETHANE "STREET-TECH" COMPLIANT SR+FO. DURABLE AND RESISTANT THEY ARE PERFECT IN EVERY SITUATION.



- 01 Anti-fatique cell to increase SR energy absorption.
- **02** Profiles engraved for a better grip on stairs.
- 03 Self-cleaning lugs.

ULTRALIGHT DUAL-DENSITY POLYURETHANE SOLE DESIGNED TO FACILITATE DYNAMIC USE AND MOVE SAFELY IN ANY SITUATION.



PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.

SR Slip resistance - on ceramic tile floor with glycerine.

P. 100

DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®)

(€EN ISO 20345:2022+A1:2024











BTB0011B0D15...

high qualiity water repellent pull-up leather. Additional 2nd color laces included. LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).


non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES:

36-48 (UK 3½-13).

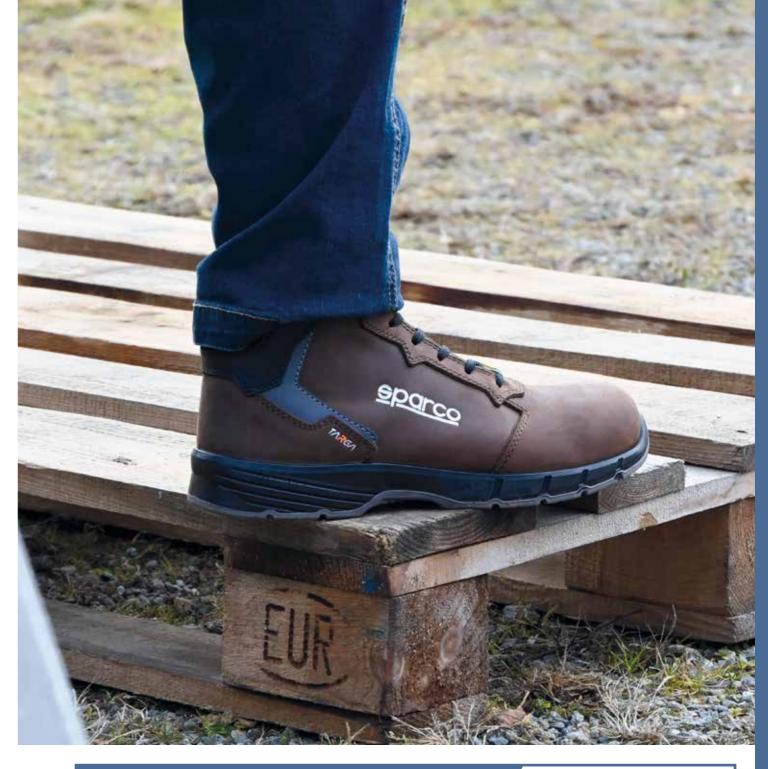

VIC ESD S3S SR FO

PREE CO



BTB0012B0D15...

high qualiity water repellent pull-up leather.

Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic in PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES:

SAFETY / OCCUPATIONAL SHOES

S NEW LINE

GOODWOOD

NEW LINE OF ANKLE BOOTS WITH SPECIAL WATER-RESISTANT MEMBRANE DRS (DRY RESPIRATION SYSTEM). FINE WATER REPELLENT NUBUCK UPPER WITH NYLON COLLAR. RESISTANT, DURABLE AND BREATHABLE, THEY DO NOT FEAR ANY WORK ENVIRONMENT.




- 01 Sharp-edged dowels for greater grip on oily surfaces.
- 02 Engraved crampons for greater grip on stairs.
- 03 Closely spaced tread blocks for maximum grip on oily surfaces.

SOFT PU MIDSOLE AND FO+HRO NITRILE RUBBER TREAD WITH SPECIFIC PRISM-FLEX+ TEXTURE WHICH ALLOWS A HIGH GRIP IN ANY CONDITION.



(€EN ISO 20345:2022+A1:2024

(EN ISO 20347:2022+A1:2024



- SR Slip resistance on ceramic tile floor with glycerine.
- HRO Contact Heat Resistance (300 °C. for 60").

P. 100



NATERPROOF



GOODWOOD LINE



DRS WATERPROOF

BTB0014B0K01...

soft nubuck resistant to water penetration, DRS membrane, nylon thermoformed collar.

3D breathable micro-perforated fabric + DRS membrane. **REMOVABLE INSOLE:**

low density antistatic PU

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: ultralight zero-perforation textile fiber (PS).

non-magnetic fiberglass, insulating, resistant to 200J

PU over-cap compliant to SC (scuff cap).

ANTISTATIC ANTI-SLIP SOLE:

PU midsole with over-cap,

FO+HRO nitrile rubber tread.

SIZES:

38-48 (UK 5-13).





BTB0015B0K01...

soft nubuck resistant to water penetration, DRS membrane, nylon thermoformed collar.

3D breathable micro-perforated fabric + DRS membrane.

REMOVABLE INSOLE:

low density antistatic PU with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

PU midsole, FO+HRO nitrile rubber tread.

38-48 (UK 5-13).

VALLEY ESD 06 SR FO HRO CI HI

BTB0015B0D15...











soft nubuck resistant to water penetration,

DRS membrane, nylon thermoformed collar.

REMOVABLE INSOLE:

low density antistatic PU with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE: PU midsole, FO+HRO nitrile rubber tread.

38-48 (UK 5-13).

LINE

ARCTIC

SAFETY ANKLE BOOTS WITH SPECIAL WATER-RESISTANT MEMBRANE DRS (DRY RESPIRATION SYSTEM), MADE OF HIGH-QUALITY WATER-REPELLENT SUEDE AND MICRO-INJECTED INSERTS. HARD-WEARING AND BREATHABLE, THEY ARE SUITABLE FOR **PARTICULARLY DAMP OR WET ENVIRONMENTS**.



- **01** Anti-fatigue cell to increase energy absorption.
- 02 Profiles engraved for enhanced grip on stairs.
- 03 Self-cleaning lugs.

SOLE IN DUAL-DENSITY POLYURETHANE WITH ENERGY ABSORPTION ON THE HEEL.



- PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.
- SR Slip resistance on ceramic tile floor with alycerine.

P. 100

(€EN ISO 20345:2022+A1:2024



NATERPROOF



ARCTIC LINE

ARCTIC \$75 SR FO CI HI SC

BTB0009B0K05...





high-quality water-repellent suede, micro-injected inserts and special DRS WATER-RESISTANT membrane.

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre.

TOE CAP:

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel.

SIZES:

36-47 (UK 3½-12).

Footwear designed for those who are forced to work in environments characterised by a high presence of water. Waterproof footwear are made with materials and techniques that prevent the entry of water guaranteeing excellent breathability together with a perfect hygrothermal comfort.

WALK TEST (according to EN ISO 20345:2022)

1,000 steps (about 20 min.) in a tank containing 3 cm of water, the wet internal surface must be < 3 cm².




DRS MEMBRANE BY SPARCO TEAMWORK

(DRY RESPIRATION SYSTEM):


The special DRS membrane by SPARCO TEAMWORK ensures maximum breathability and comfort while preventing water from penetrating into the upper, leaving the feet always dry and protected.

Made with a special material with microscopic porosity, it looks like an invisible sock that keeps the foot dry and thermally stable, both in hot and cold conditions, thus guaranteeing an ideal hygrothermal climate.

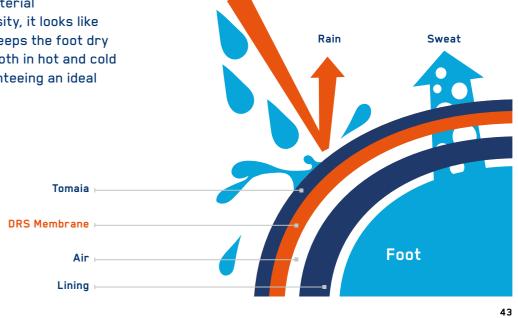

LINE **ALLROAD**

SAFETY FOOTWEAR MADE OF WATER-REPELLENT FINE NUBUCK, **SUEDE** LEATHER OR MICROFIBRE WITH NYLON COLLAR. PHYLON MIDSOLE WITH CROSSGRIP HRO RUBBER TREAD. LIGHT, PRECIOUS AND DURABLE, THEY ARE SUITABLE FOR BOTH **OUTDOOR** AND **INDOOR** USE.

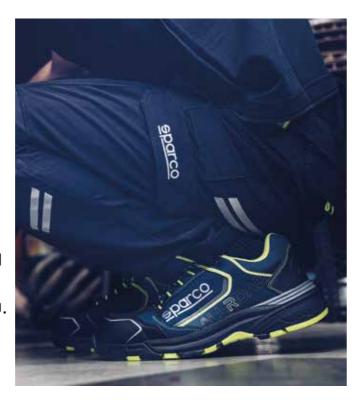

SOCHI ESD S3S SR FO HRO











07528..BMGF

HPPFR:

nylon and water-repellent microfibre.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

phylon midsole and FO+HRO nitrile rubber tread

with energy absorption on the heel.

SIZES:

38-48 (UK 5-13).

STIRIA ESD S3S SR FO HRO

07528..NRNR











HPPFR:

nylon and water-repellent microfibre.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: phylon midsole and FO+HRO nitrile rubber tread

with energy absorption on the heel.

38-48 (UK 5-13).



ULTRALIGHT SOLE WITH PHYLON* MIDSOLE AND CROSSGRIP RUBBER TREAD. IT FEATURES AN IDEAL SCULPTURE FOR MAXIMUM GRIP AND STABILISATION ON GRAVELLY, MUDDY AND SNOW-COVERED SURFACES, LIGHT AND COMFORTABLE. IT ABSORBS VIBRATIONS AND PREVENTS DAMAGE TO THE LOWER LIMBS AND THE SPINE.

* Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.



(€EN ISO 20345:2022

DGUV 112-191 COMPLIANT

(Optional and interchangeable orthopaedic insocks BY SECOSOL®)

- 01 Laminar engraving for maximum grip.
- 02 Anti-fatigue lug to increase energy absorption.
- 03 Large side drains for water, mud and debris.
- 04 Laminar engraving for greater slipping resistance.
- PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.
- SR Slip resistance on ceramic tile floor with alycerine.
- HRO Contact Heat Resistance (300 °C. for 60").

P. 100

MOTEGI ESD S3S SR FO HRO

07529..NRGF

IIPPFR:

nylon and water-repellent microfibre.

LINING: breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

phylon midsole and FO+HRO nitrile rubber tread

with energy absorption on the heel.

SIZES:

38-48 (UK 5-13).

OKAYAMA ESD S3S SR FO HRO

07529..NRNR



UPPER:

nylon and water-repellent microfibre.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS). **TOE CAP:**

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

phylon midsole and FO+HRO nitrile rubber tread with energy absorption on the heel.

SIZES:

38-48 (UK 5-13).

CAPSULE COLLECTIONS **GYMKHANA**

SPECIAL LINE OF SAFETY FOOTWEAR IN MARTINI RACING LIVERY. FLEXIBLE, LIGHTWEIGHT SOLES AND PREMIUM MATERIALS SUCH AS NUBUCK, SUEDE OR VELOUR MICROFIBER. COMFORTABLE AND WITH A UNIQUE STYLE.

THE SPECIFIC DESIGN OF THE MULTIGRIP SOLE MAKES IT PARTICULARLY SUITABLE FOR USE ON FLAT, INCLINED AND SLIPPERY SURFACES SUCH AS ROOFS (EX STANDARD UNI 11583:2015)




- 01 Self-cleaning profiles for the drainage of liquids.
- 02 Sculpted lugs for greater slip resistance.
- **03** Self-cleaning profiles for the outflow of liquids.

SUPERLIGHT EVA MIDSOLE AND MULTIGRIP FO+HRO RUBBER TREAD.



(€EN ISO 20345:2022



SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 100



GYMKHANA CAPSULE COLLECTIONS



07527MR..BM

velour microfibre and breathable micro-perforated fabric.

Additional 2nd color laces included. LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

EVA midsole and FO+HRO nitrile rubber tread

with energy absorption on heel.

SIZES:

36-48 (UK 3½-13).

MONTECARLO ESD S3S SR FO HRO

HRO T



OFFICIAL LICENSED PRODUCTS



07535MR..BM

fine water-repellent nubuck and suede. Additional 2nd color laces included.

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU with

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

EVA midsole and FO+HRO nitrile rubber tread with energy absorption on heel.

SIZES:

36-48 (UK 3½-13).

RED BULL ESD S3S SR FO HRO

METAL HRO <u>sparco</u>

07535RB..BMRS

fine water-repellent nubuck and suede. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PS).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

EVA midsole and FO+HRO nitrile rubber tread with energy absorption on heel.

SIZES:

LINE

PRACTICE/NITRO

RUNNING-STYLE SAFETY FOOTWEAR MADE OF BREATHABLE MICRO-PERFORATED 3D FABRIC AND SCRATCH-RESISTANT MICROFIBRE OR WATER-REPELLENT MICROFIBRE. LIGHT AND BREATHABLE, PERFECT FOR INDOOR AND OUTDOOR USE OR HOT WEATHER.



- 01 Laminar profiles to increase grip.
- 02 Profiles engraved for a better grip on the stairs.
- 03 Laminar profiles for greater slipping resistance.

ULTRA-FLEXIBLE SINGLE-DENSITY PU THAT INCREASES COMFORT AND REDUCES STRESS TO THE LOWER LIMBS AND THE SPINE.



- PL Puncture resistance (min.1100 N) non-metal insert: tapered nail d=4,5 mm.
- SR Slip resistance on ceramic tile floor with alycerine.

P. 100

(€EN ISO 20345:2022



KEKE ESD S1PL SR FO

07517..NRVF









breathable micro-perforated fabric and

scratch-resistant microfibre with high abrasion resistance.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PL).

TOE CAP:

non magnetic fiberglass,

insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

single-density PU with energy

absorption on the heel.

36-48 (UK 3½-13).

NIGEL ESD S1PL SR FO

07517..NRNR







breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PL).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

single-density PU with energy absorption on the heel.

SIZES:

36-48 (UK 3½-13).

DIDIER ESD S3L SR FO

07522..NRGR







UPPER:

high-quality water-repellent microfibre.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PL).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

single-density PU with energy absorption on the heel.

TOE CAP:

NEW LINE **TRACKDAY**

HANDY ESD SB E A SR FO

NEW LINE OF SAFETY FOOTWEAR FOR SPECIAL JOBS IN THE CHEMICAL, MEDICAL, PHARMACEUTICAL, FOOD AND HO.RE.CA SECTORS THAT REQUIRE **COMFORTABLE**, **FLEXIBLE**, EASY-TO-CLEAN SHOES SUITABLE FOR PROLONGED DAILY USE. THANKS TO THE UPPER IN SOFT ANTI-UV MICROFIBER, THE REMOVABLE SUPER-COMFORT INSOLE AND THE SUPER-SOFT DOUBLE-DENSITY PU SOLE. THE NEW TRACKDAY LINE REDEFINES WHITE&BLACK STANDARDS.





BTB0036B0W01...



ULTRALIGHT DUAL-DENSITY POLYURETHANE SOLE DESIGNED TO FACILITATE DYNAMIC USE AND MOVE SAFELY IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024

WALKER ESD S2 SR FO

- **01** Sculpted profiles to facilitate the flow of liquids.
- 02 Self-cleaning studs.
- 03 Engraved profiles to ensure maximum grip on any surface.

SR Slip resistance - on ceramic tile floor with glycerine.

P. 100

BTB0035B0W01.. HOMY ESD S2 SR FO UPPER: high-quality anti-UV water-repellent microfiber NEW breathable micro-perforated 3D fabric. REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE: TOE CAP:** non magnetic fibreglass, insulating, resistant to 200J. ANTI-SLIP ANTI-STATIC SOLE: PU dual density with energy absorption on the heel. 35-48 (UK 2½-13).







high-quality anti-UV water-repellent microfiber

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with energy


absorption on the heel.



OCCUPATIONAL SHOES

LINE S-PARK

RUNNING STYLE OCCUPATIONAL FOOTWEAR COMPLIANT TO THE NEW EN ISO 20347:2022+A1:2024. **SEAMLESS SUPERLIGHT MESH UPPER**, SOFT PHYLON MIDSOLE AND FO+HRO NITRILE RUBBER TREAD WITH HIGH ENERGY ABSORPTION. LIGHTWEIGHT AND BREATHABLE, THEY ARE SUITABLE FOR WORKING OR OUTDOOR LEISURE.

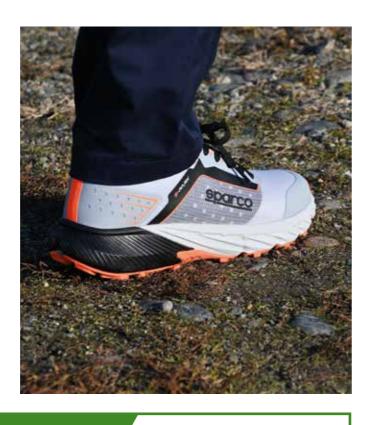



SUPERLIGHT SOLE WITH PHYLON MIDSOLE AND HRO RUBBER TREAD. SUITABLE FOR ANY USE, **EVEN FOR OUTDOOR LEISURE.**



(€EN ISO 20347:2022+A1:2024

- 01 Self-cleaning profiles for the outflow of liquids.
- 02 Central studs with heel carving for maximum flexibility and grip.
- 03 Lamellar engraving for greater slip resistance.

SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 100

LEON 01 SR FO HRO



LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

low-density antistatic PU

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile

36-48 (UK 3½-13).

BTB0007B0N31...

seamless superlight breathable mesh fabric

with ergonomic thermoforming.

rubber tread with high energy absorption.

GAP 01 SR FO HRO



52





BTB0007B0K05...

UPPER:

seamless superlight breathable mesh fabric

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

low-density antistatic PU with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile rubber tread with high energy absorption.

36-48 (UK 3½-13).

SALOU 01 SR FO HRO

METAL HRO





BTB0007B0E43...

UPPER:

seamless superlight breathable mesh fabric LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

low-density antistatic PU

with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile

rubber tread with high energy absorption.

36-48 (UK 3½-13).

SEPANG 01 SR FO HRO

BTB0007B0K12...







seamless superlight breathable mesh fabric

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

low-density antistatic PU with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile rubber tread with high energy absorption.

OCCUPATIONAL SHOES

MARTINI RACING

S-PARK

RUNNING STYLE OCCUPATIONAL FOOTWEAR WITH OFFICIAL MARTINI RACING LIVERY, COMPLIANT TO THE NEW EN ISO 20347:2022+A1:2024.

SEAMLESS SUPERLIGHT MESH UPPER, SOFT PHYLON MIDSOLE AND FO+HRO NITRILE RUBBER TREAD WITH HIGH ENERGY ABSORPTION. LIGHTWEIGHT AND BREATHABLE. THEY ARE SUITABLE FOR WORKING OR LEISURE.



- 01 Self-cleaning profiles for the outflow of liquids.
- **02** Central studs with heel carving for maximum flexibility and grip.
- **03** Lamellar engraving for greater slip resistance.

SUPERLIGHT SOLE WITH PHYLON MIDSOLE AND HRO RUBBER TREAD. SUITABLE FOR ANY USE, EVEN FOR OUTDOOR LEISURE.

- **SR** Slip resistance on ceramic tile floor with glycerine.
- HRO Contact Heat Resistance (300 °C. for 60").

P. 100





OFFICIAL LICENSED PRODUCTS

(€EN ISO 20347:2022+A1:2024



S-PARK MARTINI RACING

SARDINIA 01 SR FO HRO

BTB0008D0N31...





UPPER:

seamless superlight breathable mesh fabric

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: low-density antistatic PU

with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE: super comfortable PHYLON midsole, FO+HRO nitrile rubber tread with high energy absorption.

SIZES

36-48 (UK 3½-13).

HOODIE REPLICA MARTINI RACING

01279MR..

SPECIFICATIONS:

Hooded sweatshirt made of ultra-soft cotton blend featuring the iconic Martini Racing livery. The logo patches and stripes are fully embroidered.

MATERIAL:

90% cotton, 10% polyester 300 gr/m² hood lined in soft jersey SIZES: XS-3XL

Visit SPARCO-OFFICIAL.COM





TECH SOFT-SHELL YORK

YORK GREY/GREEN

02412GSVF..

YORK BLACK/ORANGE

02412NRAF..





TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SPECIFICATIONS:

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Elasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SPECIFICATIONS:

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Elasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

YORK **GREY/YELLOW**

02412GSGF..



TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SIZES: XS-3XL SPECIFICATIONS:

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Elasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

YORK BLACK/GREY

02412NRGS..




TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SIZES: XS-3XL

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Elasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

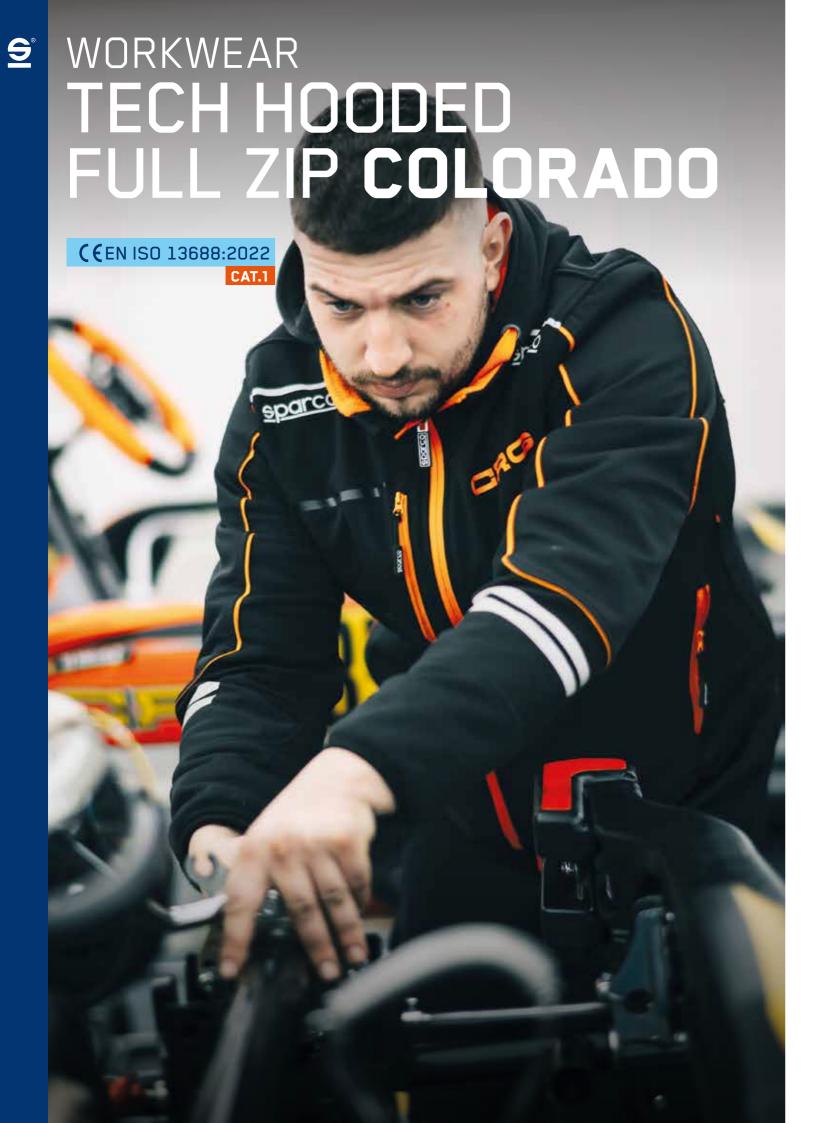

TECH HOODED FULL ZIP COLORADO

COLORADO GREY/GREEN

02414GSVF..



TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester SIZES: XS-3XL

SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

COLORADO BLACK/ORANGE

02414NRAF..



TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester

SIZES: XS-3XL SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

COLORADO GREY/YELLOW

02414GSGF...



TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester

SIZES: XS-3XL

SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

COLORADO BLACK/GREY

02414NRGS..




TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester

SIZES: XS-3XL SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

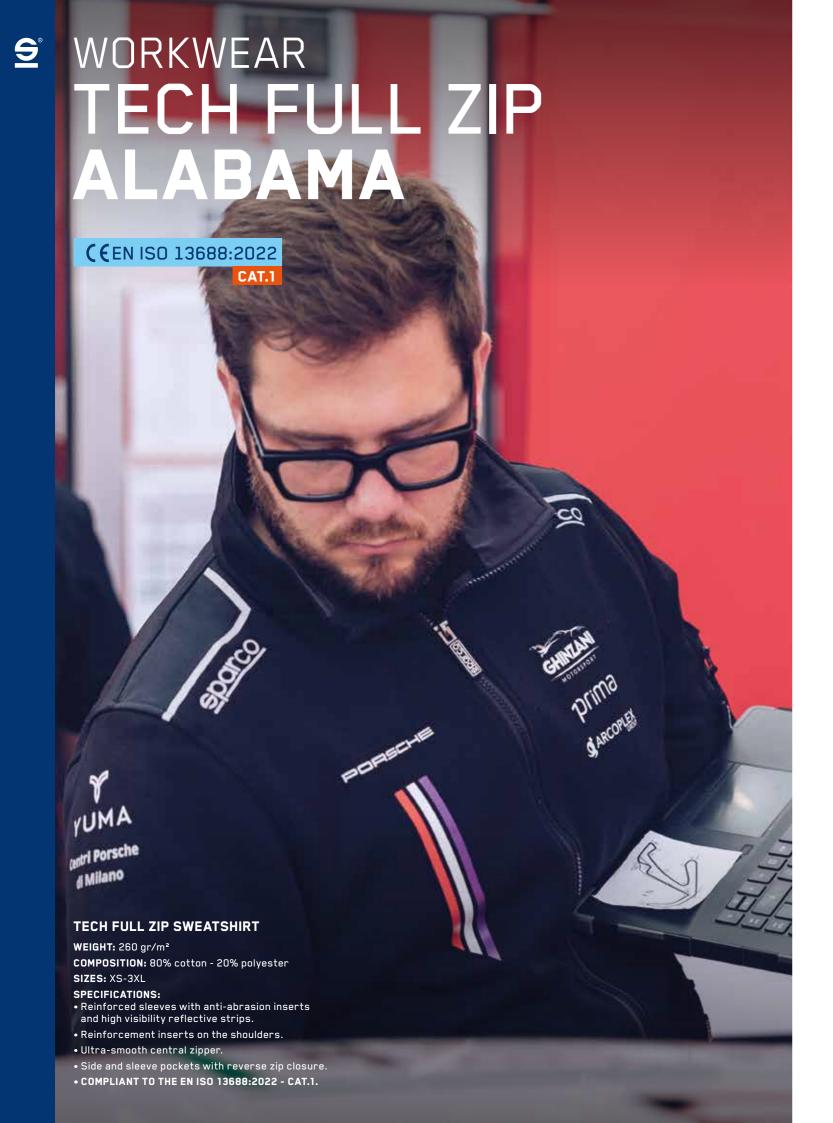

TECH FULL ZIP ALABAMA















TECH LIGHT VEST ILLINOIS

SIZES: XS-3XL

ILLINOIS GREY/GREEN

02419GSVF..



TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

ILLINOIS BLACK/ORANGE

02419NRAF..

SIZES: XS-3XL



TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

ILLINOIS GREY/YELLOW

02419GSGF...

SIZES: XS-3XL



TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

ILLINOIS BLACK/GREY

02419NRGS..



SIZES: XS-3XL

TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH POLO TOLEDO

TOLEDO GREY/GREEN

02415GSVF...



TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with piquè effect

SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TOLEDO BLACK/ORANGE

02415NRAF..



TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with piquè effect SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TOLEDO GREY/YELLOW

02415GSGF..



TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with piquè effect SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TOLEDO BLACK/GREY

02415NRGS..



TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with pique effect SIZES: XS-3XL

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH T-SHIRT TUCSON

TUCSON GREY/GREEN

02416GSVF...



TECH T-SHIRT

WEIGHT: 170 gr/m² **COMPOSITION:** 50% cotton, 50% polyester piquè effect **SIZES:** XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TUCSON BLACK/ORANGE

02416NRAF..



TECH T-SHIRT

WEIGHT: 170 gr/m²

COMPOSITION: 50% cotton, 50% polyester piquè effect SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TUCSON GREY/YELLOW

02416GSGF...



TECH T-SHIRT

WEIGHT: 170 gr/m² COMPOSITION: 50% cotton, 50% polyester piquè effect SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TUCSON BLACK/GREY

02416NRGS..



TECH T-SHIRT

WEIGHT: 170 gr/m² COMPOSITION: 50% cotton, 50% polyester piquè effect SIZES: XS-3XL

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.



TECH TROUSERS OREGON

OREGON GREY/GREEN

02417GSVF...



SIZES: XS-3XL

TECH TROUSERS

OREGON BLACK/ORANGE

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH TROUSERS

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

OREGON GREY/YELLOW

02417GSGF..



SIZES: XS-3XL

TECH TROUSERS

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

OREGON BLACK/GREY

02417NRGS..

02417NRAF..

SIZES: XS-3XL



SIZES: XS-3XL

TECH TROUSERS


WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

WORKWEAR

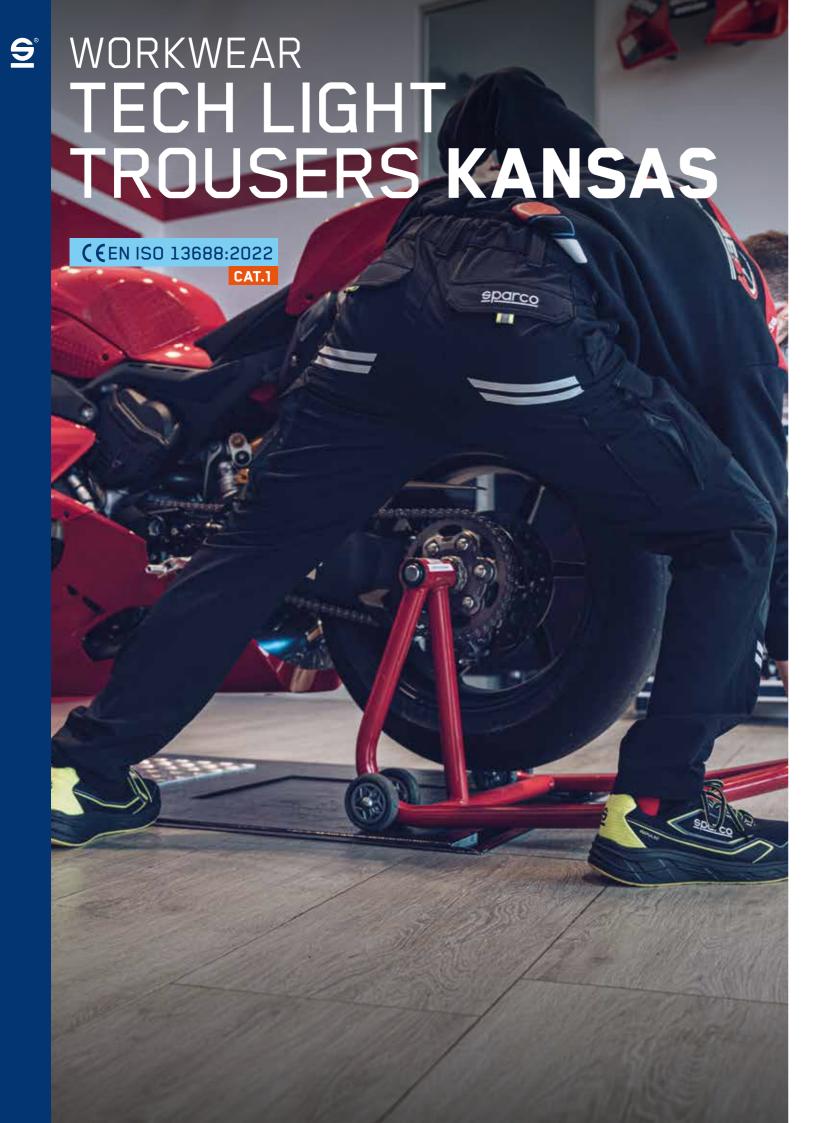

TECH LIGHT TROUSERS KANSAS

KANSAS GREY/GREEN

02425GSVF..



SIZES: XS-3XL

WEIGHT: 170 gr/m²

TECH LIGHT TROUSERS

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

KANSAS BLACK/ORANGE

02425NRAF..

SIZES: XS-3XL



TECH LIGHT TROUSERS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

KANSAS GREY/YELLOW

02425GSGF...



SIZES: XS-3XL

TECH LIGHT TROUSERS

WEIGHT: 170 ar/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

KANSAS BLACK/GREY

02425NRGS..



SIZES: XS-3XL


TECH LIGHT TROUSERS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

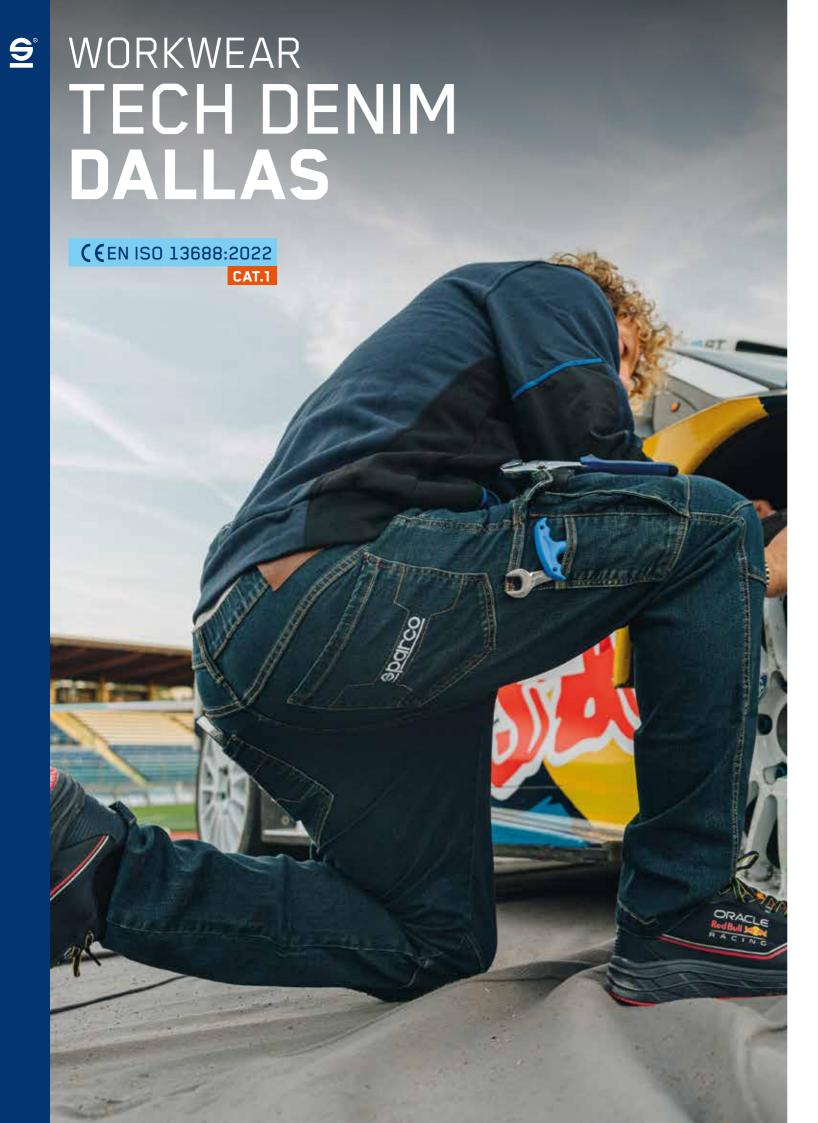

TECH DENIM DALLAS

DALLAS

02430BS..

SIZES: XS-3XL

TECH DENIM JEANS

WEIGHT: 240 gr/m²

COMPOSITION: 98% cotton - 2% spandex

SIZES: XS-3XL

- Ergonomic construction to facilitate knee movement.
- Tool ring on side pocket.
- Elasticated waist.
- Embroidered details.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.







TECH LIGHT SHORTS LAREDO

LAREDO GREY/GREEN

02428GSVF...

SIZES: XS-3XL



TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden side pocket with zip closure.
- Badge holder ring on the front left belt loop.
- High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

LAREDO GREY/GREEN

02428NRAF..



SIZES: XS-3XL

TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden side pocket with zip closure.
- Badge holder ring on the front left belt loop.
- High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

LAREDO GREY/GREEN

02428GSGF..



SIZES: XS-3XL

TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden side pocket with zip closure.
- Badge holder ring on the front left belt loop.
- High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

LAREDO GREY/GREEN

02428NRGS..



SIZES: XS-3XL

TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

- Zip and button closure.
- Hidden side pocket with zip closure.
- Badge holder ring on the front left belt loop.
- High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.





VERMONT BLACK

BTP0001B0K11...



CARGO TROUSERS WITH SIDE POCKETS.

WEIGHT: 190 gr/m²

COMPOSITION: 60% cotton - 40% polyester SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden internal side pocket with zip closure.
- COMPLIANT TO EN ISO 13688:2022 CAT.1.

VERMONT BLUE NAVY/RED

BTP0001B0N31..

SIZES: XS-3XL



CARGO TROUSERS WITH SIDE POCKETS.

WEIGHT: 190 gr/m²

COMPOSITION: 60% cotton - 40% polyester SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden internal side pocket with zip closure.
- COMPLIANT TO EN ISO 13688:2022 CAT.1.

HAWAII BLACK

BTP0002B0K11..

SIZES: XS-3XL



CARGO BERMUDA WITH SIDE POCKETS.

WEIGHT: 190 gr/m²

COMPOSITION: 60% cotton - 40% polyester SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden internal side pocket with zip closure.
- COMPLIANT TO EN ISO 13688:2022 CAT.1.

HAWAII BLUE NAVY/RED

BTP0002B0N31..

SIZES: XS-3XL




CARGO BERMUDA WITH SIDE POCKETS.

WEIGHT: 190 gr/m²

COMPOSITION: 60% cotton - 40% polyester SIZES: XS-3XL

- Zip and button closure.
- Hidden internal side pocket with zip closure.
- COMPLIANT TO EN ISO 13688:2022 CAT.1.



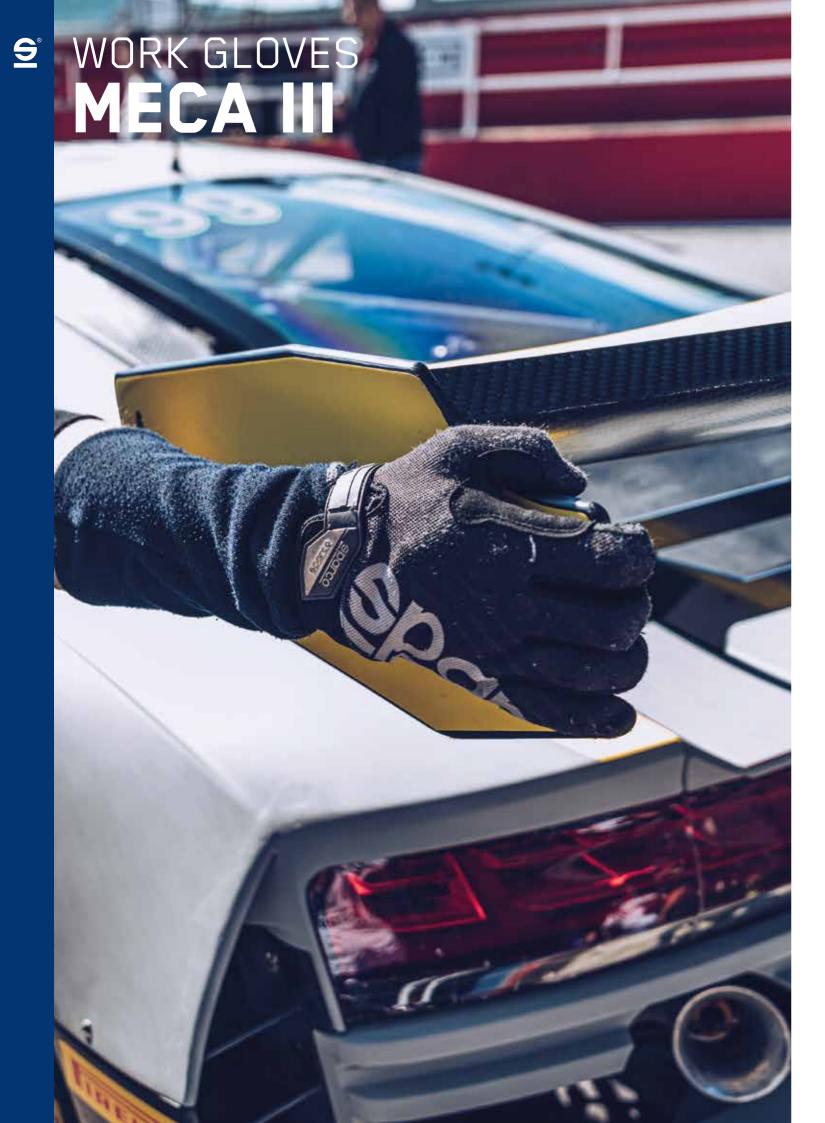

MECA III



002093..BMAF

WORK GLOVES

COMPOSITION:
47% polyester, 35% suede, 18% elastane SIZES:

SPECIFICATIONS:

abrasion-resistant synthetic leather palm. Reinforcements between thumb and index finger. Back made of abrasion-resistant printed stretch fabric. Fastening strap to adjust fit.












®





WALL DISPLAY SHOES/CLOTHING 100X56X212 CM
DIMENSIONS: 100x56 h.212 cm
MATERIAL: Powder coated steel

- **COMPLETE WITH:** 18 shoe shelves 20x10 cm (including 6 load bars)
- 2 clothing bars (depth 25 cm)
- 1 shelf with brackets 99x38 cm
- Metal crowner with Sparco Teamwork logo

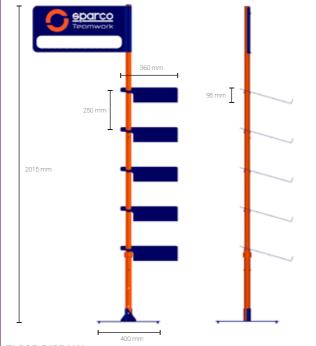

FLOOR DISPALY

Floor display for shoes and clothing.
Completely adjustable and adaptable to any environment and height, it is made of solid powder-coated metal. Base with welded reinforcement and rubber feet. Suitable for displaying 5 pairs of shoes and up to 13 items of clothing. Comes complete with a kit of 10 SPARCO® custom hangers (cod. 099108NR10).















86

5

5









07527..VSLI



07527..BMGF

TACOMA









07527..AZBM





07535..GSVF 🙀 👍 🕪 🕱

LEAP







07535..BMRS 原配 体 中 本





BAKU ESD S3S SR FO HRO



07528..NRVF 🙀 🧀 🕪 🍑







ESD S3S SR FO HRO

07529..GSVF 🧎 👍 🕪 똷



07536..BMRS 🎎 💪 া 📜

ACROPOLIS

ESD S3S SR FO HRO

OLYMPUS







ROC STONE **ESD S3S SR FO HRO**



07528..TAGI 🧸 🚱 🕸 🔰 07529..TAGI 🥻 🚱 🕸

ESD S3S SR FO HRO















PRACTICE / NITRO / INDY

NELSON ESD S1PL SR FO



JOS

ESD S1PL SR FO



07517..NRAZ

PETTER

ESD S3L SR FO



07517..NRFU

JODY

ESD S1PL SR FO











07522..NRAZ

CHARLOTTE

ESD S3S SR FO LG



MARCUS ESD S3L SR FO



07522..RSNR

EDMONTON



HANNU ESD S3L SR FO



07522..BIBI





07537..GSAZ

DURANGO

01 FO SRA





ESD S1PS SR FO LG

07539..TAGI



SIZES: 37-47^{*}

*Subject to availability

TOROUE





001289..BMAF



001289..NRAZ

ALGARVE 01 FO SRA



001289..NRRS



OUTLET

























SIZES: XS-3XL

SIZES: XS-3XL



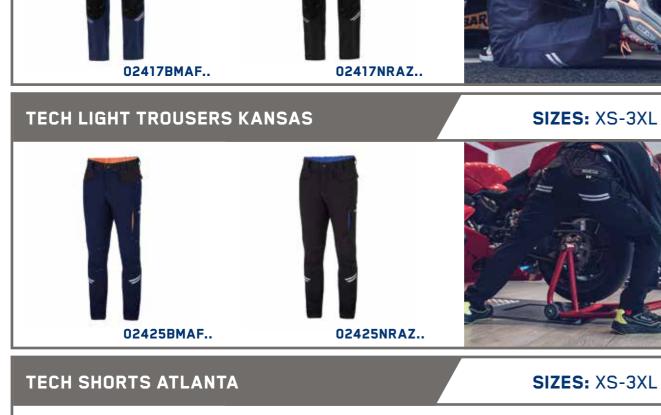



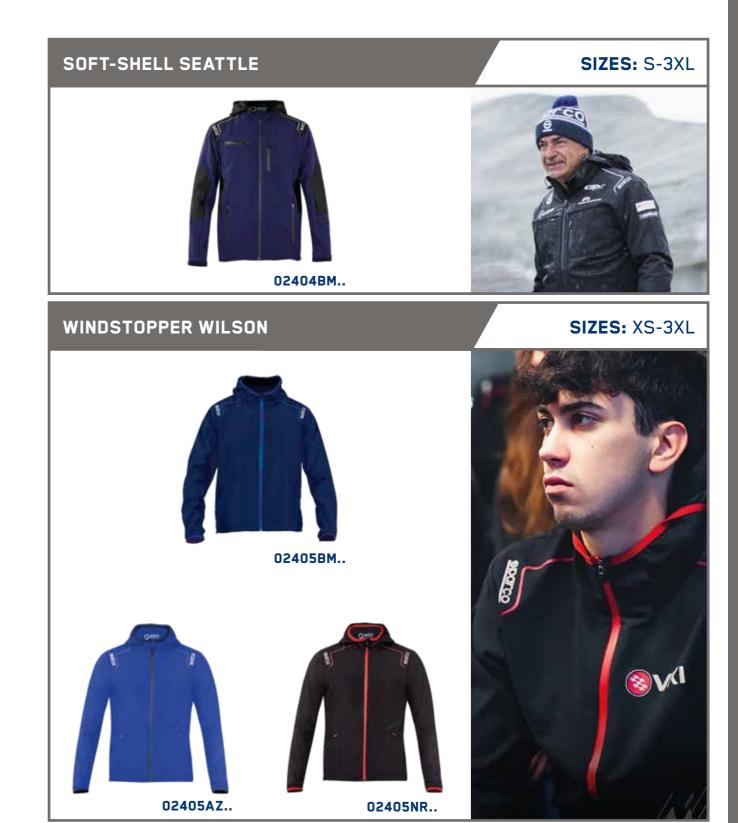



OUTLET

CERTIFICATIONS AND CE STANDARDS

SPARCO TEAMWORK footwear are manufactured using both synthetic and natural materials that comply with the relevant sections of the EN ISO 20345:2022 / EN ISO 20345:2022+A1:2024 / EN ISO 20347:2022+A1:2024 standards for performance and quality. SPARCO TEAMWORK safety footwear are designed to minimise the risk of injury that could be inflicted on the wearer during use. They must be used in conjunction with a safe working environment and do not completely prevent injury if an incident that exceeds the test limits of the EN ISO 20345:2022 / EN ISO 20345:2022+A1:2024 / EN ISO 20347:2022+A1:2024 standards occurs.

GUIDE TO STANDARDS:

EN ISO 20344:2021 Test methodology and general requirements.

EN ISO 20345:2022 / 20345:2022+A1:2024 Specifications for safety footwear with toe cap resistance to 200 J.

ENISO 20347:2022 / 20347:2022+A1:2024 Specifications for "occupational" or "professional" footwear (no specific toe cap resistance).

SAFETY FOOTWEAR COMPLIANT WITH EN ISO 20345:2022 / 20345:2022+A1:2024

Sparco Teamwork footwear compliant with EN ISO 20345:2022 / EN ISO 20345:2022+A1:2024 protect the wearer's toes from the risk of injury due to falling objects and crushing when worn in industrial and commercial environments where potential hazards exist.

The impact protection provided is 200 Joules.

The compression protection provided is 15,000 Newtons.

Category	Class	Additional requirements		
SB	l o II	Safety basic requirements		
SI	I	SB + Closed heel area + Antistatic property + Energy absorption of seat region		
S2	I	S1+ Upper water penetration and absorption		
S3 (metal insert type P) or S3L (non-metal insert type PL) or S3S (non-metal insert type PS)	I	S2 + perforation resistance according to the type + cleated outsole		
S4	П	SB + Closed heel area + Antistatic property + Energy absorption of seat region		
S5 (metal insert type P) or S5L (non-metal insert type PL) or S5S (non-metal insert type PS)	II	S4 + perforation resistance according to the type cleated outsole		
S6	I	S2 + water resistance of the whole footwear		
S7 (metal insert type P) or S7L (non-metal insert type PL) or S7S (non-metal insert type PS)	ı	S3 + water resistance of the whole footwear		
Class I: Footwear made of leather and other materials, excluding all-rubber or all-polymeric footwear				
Class II: All-polymeric (i.e. entirely moulded) including all-rubber (i.e. entirely vulcanized) footwear				


OCCUPATIONAL FOOTWEAR COMPLIANT WITH EN ISO 20347:2022 / 20347:2022+A1:2024:

Footwear compliant with EN ISO 20347:2022 / 20347:2022+A1:2024 are called "occupational footwear" or "professional footwear" and do not require any specific toe cap resistance.

Category	Class	Additional requirements		
ОВ	I			
01	I	As OB, plus + Closed heel area + Energy absorption at the heel region + Antistatic		
02	I	As 01 + Penetration and absorption of water in the upper part		
03 (Metal insert type P) or 03L (non-Metal insert type PL) or 03S (non-Metal insert type PS)	I	As O2 + Puncture resistance by type + Studded sole		
04	П	As OB, + Closed heel area + Energy absorption in the heel region + Antistatic		
OS (Inserto Metallico tipo P) o OSL (Inserto non-Metallico tipo PL) o OSS (Inserto non-Metallico tipo PS)	П	As O4 + Puncture resistance by type + Studded solei		
06	I	As O2 + Water penetration into the entire shoe		
07 (Inserto Metallico tipo P) o 05L(Inserto non-Metallico tipo PL) o 05S(Inserto non-Metallico tipo PS)	I	As 03 + Water penetration resistance of the whole shoe		
NOTE 1: To facilitate marking, this table classifies work footwear with the most common combinations of basic and additional requirements.				
NOTE 2: If the footwear has not been tested according to the slip resistance requirements, it is marked with the symbol "0".				
OBH: Hybrid footwear.				

PRODUCT MARKING

Marking on footwear denotes that the footwear is licensed according to the PPE regulation and is as follows:

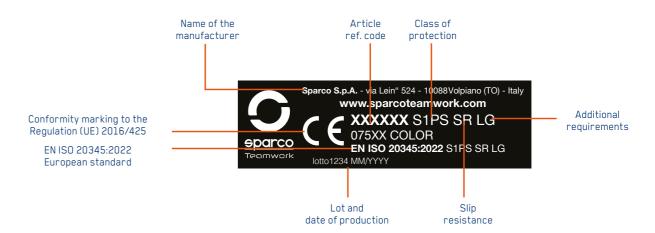

CERTIFICATIONS AND CE STANDARDS

ADDITIONAL PROTECTIONS: THE ADDITIONAL REQUIREMENTS

Additional protections may be provided, identified on the product by the following markings:

	Marking code
Perforation resistance	
Perforation resistance (min.1100 N) metal insert : d=4.5mm Conical Nail	P
Perforation resistance (min.1100 N) non-metal insert :d=4.5mm Conical Nail	PL
Per foration r esistance (min.1100 N & e ach single value >950 N) non-metal insert: d=3.0mm Conical Nail	PS
Electrical properties	
Par tially Conductive (maximum r esistance 100 k Ω)	С
Antistatic (resistance range of 100 k Ω to 1000 M Ω)	A
Resistance to inimical environments:	
Heat Insulation of sole complex	н
Cold Insulation of sole complex	CI
Energy absorption of seat region (20 Joules)	E
Water resistance	WR
Metatarsal protection	М
Ankle protection	AN
Cut resistant	CR
Scuff Cap abrasion	SC
Slip resistance - on ceramic tile floor with glycerine	SR
Upper	
Water penetration and water absorption	WPA
Outsole	
Resistance to hot contact	HRO
Resistance to fuel oil	FO
Ladder grip	LG

PERFORATION RESISTANCE

In Sparco Teamwork footwear, non-metal perforation-resistance insert is used.

The perforation resistance of this footwear has been measured in the laboratory using standardized nails and forces. Nails of smaller diameter and higher static or dynamic loads will increase the risk of perforation occurring. In such circumstances, additional preventative measures should be considered. Three generic types of perforation resistant inserts are currently available in PPE footwear. These are metal types and those from non-metal materials, which shall be chosen on basis of a job-related risk assessment. All types give protection against perforation risks, but each has different additional advantages or disadvantages including the following:

- Metal (e.g. S1P, S3): Is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking techniques may not cover the entire lower area of the foot.
- Non-metal (PS or PL or category e.g. S1PS, S3L): May be lighter, more flexible and provide greater coverage area, but the perforation resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness). Two types in terms of the protection afforded are available. Type PS may offer more appropriate protection from smaller diameter objects than type PL.

SLIP RESISTANCE

For footwear successfully tested against EN ISO 20345:2022 slip resistance, the following marking symbol apply:

- Basic requirement of slip resistance: Ceramic tile with sodium lauryl sulphate, no symbol.
- Additional requirement of slip resistance: Ceramic tile with glycerol, symbol SR.
- The footwear is not tested against slip resistance requirement, it is marked with symbol "Ø". Note: Slippage may still occur in certain environments.

CE DECLARATION OF CONFORMITY

For Declaration of conformity, please refer to website: www.sparcoteamwork.com.


ESD CEI EN 61340-5-1 2016 | COR 1:2017 STANDARD

The abbreviation ESD (ElectroStaticDischarge) indicates a discharge of static energy that passes from one body to another. In hazardous workplaces, ESD discharges can be the cause of even serious accidents (starting a fire), and can damage machinery and their sensitive components.

ESD shoes are required for:

- Work with microchips
- Production of sensitive electrical parts
- Painting
- Working in contact with flammable liquids and gases

Sparco Teamwork ESD footwear comply with the regulation of the EN IEC 61340-5-1:2024 and have been certified according to EN IEC 61340-4-3:2018.

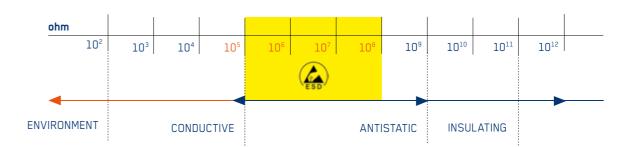

COMPLIANCE WITH THE REACH REGULATION

The company complies with the REACH Regulation (EC) no. 1907/2006 in force since 1 June 2007, ensuring that the products used and supplied by SPARCO TEAMWORK:

- do not contain SVHC (Substance of Very High Concern) substances;
- do not contain substances that are on the list in Annex XIV_ of the REACH Regulation;
- do not contain substances that are on the constantly updated Candidate List;
- do not contain substances subject to restrictions (Annex XVII of REACH) that the relative restrictions of use are observed.

Furthermore, in the event that an article contains an SVHC (Substance of Very High Concern) substance or one on the Candidate List in concentrations higher than 0.1% weight/weight, sufficient information is provided with the name of the substance and instructions helpful for the safe use of the article (see Article 59.1 of REACH).

INDEX

SAFETY SHOES

ACROPOLIS	P. 90	JOS	P. 91	RIVER	P. 41	STONE	P. 90
ALGARVE	P. 91	JURI	P. 27	ROC	P. 90	SUNNY	P. 29
ARTIC	P. 43	KEKE	P. 49	ROTOR	P. 13	SUZUKA	P. 19
ARTURO	P. 36	KEYNES	P. 17	SALOU	P. 53	TAKUMA	P. 21
ASAN	P. 21	LANDO	P. 90	SANREMO	P. 33	TACOMA	P. 90
ASTER	P. 28	LEAP	P. 90	SANDRO	P. 36	TEXAS	P. 24
BAKU	P. 90	LEON	P. 52	SANYO	P. 18	VALLEY	P. 41
BALTIMORA	P. 31	LINFORD	P. 13	SARDINIA	P. 55	VIC	P. 39
CHARADE	P. 91	LUCAS	P. 15	SEB	P. 90	WALKER	P. 51
CHARLOTTE	P. 91	LUTON	P. 12	SEPANG	P. 53	WILLY	P. 37
CHESTER	P. 90	MARCUS	P. 91	SOCHI	P. 44	WILLEN	P. 12
CHRIS	P. 15	MARTINI	P. 47	SONOMA	P. 22	YUKI	P. 18
COLTON	P. 25	METEOR	P. 32	STIRIA	P. 44		
CONOR	P. 26	MIKKO	P. 91				
CORSICA	P. 16	MILTON	P. 17				
COSY	P. 51	MIRAGE	P. 16	WORKWEAR			
DANICA	P. 31	MONTECARLO	P. 47				
DANI	P. 90	MORENO	P. 35	ALABAMA TECH FULL ZIP			P. 63
DELL	P. 41	MOTEGI	P. 45	ATLANTA TECH SHORTS			P. 94
DETROIT	P. 25	NAOKI	P. 21	AUSTIN TECH LIGHT-SHELL			P. 92
DIDIER	P. 49	NELSON	P. 91	COLORADO TECH HOODED FULL ZIP			P. 61/93
DURANGO	P. 91	NIGEL	P. 49	DALLAS TECH DENIM			P. 75
EDMONTON	P. 91	NINO	P. 38	HAWAII CARGO BERMUDA			P. 78
FARGO	P. 35	NURBURG	P. 90	ILLINOIS TECH LIGHT VEST			P. 65/93
FELIX	P. 24	OKAYAMA	P. 45	KANSAS TECH LIGHT TROUSERS			P. 73/94
FORESTER	P. 28	OLYMPUS	P. 90	LAREDO TECH LIGHT SHORTS			P. 77/94
FUJI	P. 19	ONTARIO	P. 35	OREGON TECH TROUSERS			P. 71/94
GAP	P. 52	OSCAR	P. 27	PORTLAND POLO			P. 95
GEORGE	P. 15	PATO	P. 23	SEATTLE SOFT-SHELL			P. 95
GREGOR	P. 26	PAUL	P. 37	TOLEDO TECH POLO			P. 67/93
HANNU	P. 91	PETTER	P. 91	TUCSON TECH T-SHIRT			P. 69/93
HANDY	P. 50	RAICHMOND	P. 31	VERMONT CARGO TROUSERS			P. 78
ному	P. 50	RED BULL	P. 47	WILSON WINDSTOPPER			P. 95
JODY	P. 91	RANGER	P. 29	YORK TECH SOFT-SHELL			P. 59/92

100

INDEX

WORK GLOVES

MECA III GLOVES	P. 83
-----------------	-------


POP TOOLS

COUNTER DISPLAY	P. 87
FLOOR DISPLAY	P. 86
GYMKHANA KEYCHAIN	P. 87
HANGER	P. 87
LAYNARD	P. 87
PLEXY DISPLAY	P. 86
SHELF HIGHLIGHTER	P. 87
TEAMWORK FLOORMAT	P. 87
TEAMWORK KEYCHAIN	P. 87
WALL DISPLAY	P. 86



The data and characteristics indicated in this catalogue are subject to changes without prior notice. The photographic reproduction of the shades of colour may not be perfectly faithful to reality.

In order to constantly improve the collections, the products contained in this catalogue could be replaced or modified. The photos contained are purely illustrative and not binding.

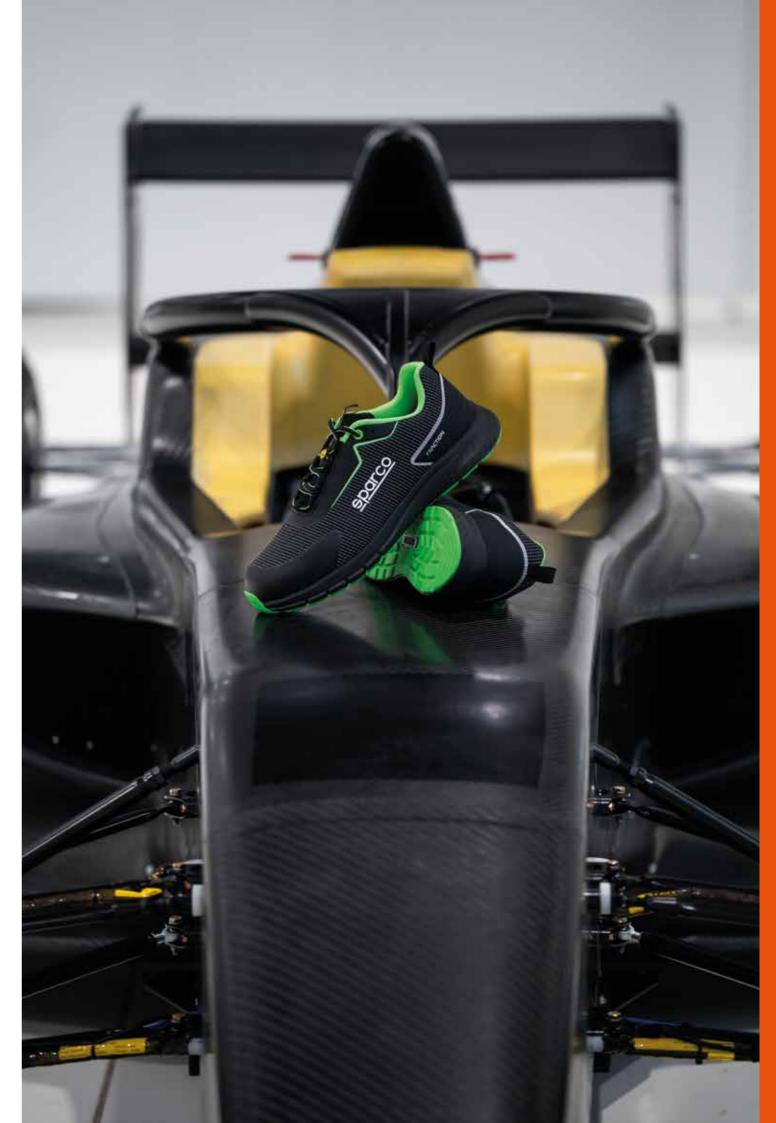





THE POWER OF PERFORMANCE

HEADQUARTERS

SPARCO S.p.A. Via Leini, 524 10088 Volpiano (TO) - Italy Tel. +39 011 22.40.716 e-mail: teamwork@sparco.it www.sparco-official.com

BRANCH

SPARCO TEAMWORK IBERIA, SL C/ Illa de Buda, 2 Polígono industrial Can Canals 08192 Sant Quirze del Vallés. Barcelona +34 93 806 54 94 info@iberia.sparcoteamwork.com





